

# Ever-tie Lighting

ODM focus on North America commercial indoor LED lighting

---

Founded in 2013



# BEST IN CLASS

ISO9001:2015 ISO14001:2015



13 years

Lighting  
manufacturing  
experience

30 million  
PCS

Cumulative sales

110 million  
US\$

Sales in 2022

100,000m<sup>2</sup>

Factory area

800+

Employee

10 million  
PCS

Annual  
capacity



**Fast and flexible response**  
**Stable and competitive supply chain**  
**Trustworthy delivery**

# ODM focus on North America indoor commercial LED lighting



## More trustworthy, Win-win Partnership



UL Witness Lab.



Reliability Testing Lab.



IES Test Lab.



UL WTDP



Assembly Workshop



Spraying Workshop



Warehouse



Industrial Robot



# Global Manufacturing



Vietnam factory



# LED Fixture Product Catalog



## HIGH BAY



## STRIP



### STRIP RETROFIT KIT



## TROFFER



### TROFFER RETROFIT KIT



## PANEL



### PANEL RETROFIT KIT



## VAPOR TIGHT



### WRAPAROUND



## LINEAR LIGHT



### UNDER CABINET LIGHT



## Various products, More choice

### Customization

- High product scalability with sensor/EM etc.
- Knowhow of American Standard SSL fixtures

### Guaranteed Performance

- Products strictly comply with UL, CUL, ETL, DLC, FCC etc.
- Production system and supply chain with quality traceable
- Environmental friendly and sustainable package materials

new

# UFO high bay




## TOP feature

- 145 LPW, DLC 5.1 premium
- 3 CCT and 2CCT version optional
- Beam angle changeable by replacing optical lens\*
- Sensor and EM solution ready
- 120-277V/120-347V/277-480V optional
- Ambient Operating Temp: -40°C-50°C
- Customization







## Lumen package

Diameter	Lumens	Wattage	LPW
13.4"(340)	34,800	240	145
11.8"(300)	29,000	200	145
10.2"(260)	21,750	150	145
	14,500	100	145









\* Beam angle options: 90°x90°(Default), 60°x60°



LED High Bay Fixtures	ETLB6D	ETLB5A	ETLB5B	ETLB7D	ETLB7A	ETLHP
	<b>NEW</b> 			<b>NEW</b> 		<b>NEW</b> 
Features	2 glowing units, Non-Class 2 driver, <b>Aluminum die-casting</b>	2 glowing units, <b>Class 2 driver, Galvanized steel</b>	2 glowing units, Non-Class 2 driver, <b>Galvanized steel</b>	Complete luminous surface, Non-Class 2 driver, <b>Aluminum die-casting</b>	Complete luminous surface, <b>Class 2 driver, Galvanized steel</b>	<b>NSF Vapor tight high bay</b> , Mainly used in food cold storage, High-level Surge protection, OTP
Power	78W-400W	78W-400W	78W-400W	78W-400W	78W-400W	100W-200W
Lumens	11,700L – 60,000L	11,700L – 60,000L	11,700L – 60,000L	11,700L – 60,000L	11,700L – 60,000L	16,000L – 32,000L
LPW <sup>[1]</sup>	150 LPW	150 LPW	150 LPW	150 LPW	150 LPW	160 LPW
Power	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable
CCT <sup>[1]</sup>	Fixed or Switchable (4000K/5000K)	Fixed or Switchable (4000K/5000K)	Fixed or Switchable (4000K/5000K)	Fixed or Switchable (4000K/5000K)	Fixed or Switchable (4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)
Ta Rating	<b>-40°C, up to 55°C</b>	-20°C - 50°C	-20°C - 50°C	<b>-40°C, up to 55°C</b>	-20°C - 50°C	-40°C - 50°C(40°C when Surface mounted)
Listings	Damp Location	Damp Location	Damp Location	Damp Location	Damp Location	NSF, Wet Location, IP66, IK10, NEMA4X
DLC	5.1P/5.1S	5.1P/5.1S	5.1P/5.1S	5.1P/5.1S	5.1P/5.1S	5.1P/5.1S
Optics	Flat frosted lens, PC	Flat optical lens, PMMA	Flat optical lens, PC	Flat frosted lens, PC	Flat optical lens, PMMA	Frosted lens, PC
Distributions	General, Aisle	Genera, Aisle	General, Aisle	General, Aisle	Genera, Aisle	General
Electrical scalability	DC sensor, EM, Cord and Plug, SPD, EMI filter, Dim to Off, 120-347/277-480 optional.	DC sensor, EM, Cord and Plug, EMI filter, Dim to Off, 120-347 optional, Autotransformer.	DC sensor, EM, Cord and Plug, EMI filter, Dim to Off, 120-347 optional, Autotransformer.	DC sensor, EM, Cord and Plug, SPD, EMI filter, Dim to Off, 120-347/277-480 optional.	DC sensor, EM, Cord and Plug, EMI filter, Dim to Off, 120-347 optional, Autotransformer.	DC sensor, EM, Dim to Off, 120-347 optional.
Mounting kits options	Cable kit, Chain kit, Surface mount kit, Pendant box, Wire guards	Cable kit, Chain kit, Surface mount kit, Pendant box, Wire guards	Cable kit, Chain kit, Surface mount kit, Pendant box, Wire guards	Cable kit, Chain kit, Surface mount kit, Pendant box, Wire guards	Cable kit, Chain kit, Surface mount kit, Pendant box, Wire guards	Cable kit, Chain kit, Surface mount kit, Wire guards
Size	1FT:12.6"*10.2" 1.2FT:14.2"*10.2" 1.6FT:19.7"*11.8" 2.4FT:28.3"*10.2" 3.3FT:39.4"*11.8" Height:1.9"	1.4FT:16.5"*10.2" 1.9FT:22.8"*10.2" 2.6FT:31.1"*10.2" 3.7FT:44.1"*10.2" Height:1.8"	1.1FT:13.0"*10.2" 1.4FT:16.5"*10.2" 1.9FT:22.8"*10.2" 2.6FT:31.1"*10.2" 3.7FT:44.1"*10.2" Height:1.8"	1FT:12.6"*10.2" 1.2FT:14.2"*10.2" 1.6FT:19.7"*10.2" 2.4FT:28.3"*10.2" 3.3FT:39.4"*10.2" Height:1.9"	1.4FT:16.5"*10.2" 1.9FT:22.8"*10.2" 2.6FT:31.1"*10.2" 3.7FT:44.1"*10.2" Height:3.1"	Length: 47.2" Width: 10.2" Height: 4.5"

[1] For other efficacy or CCT needs, please contact the sales



LED Strip Fixtures	ETLSN-W	ETLSN-V	ETLSN-N	ETLSN-S	ETLSRK-B	ETLSTW-B
	<b>NEW</b> 	<b>NEW</b> 			<b>Upgrade</b> 	
Features	<b>luminous part integrated, faster installation of fixture, EM and sensor</b>	<b>Slim, luminous part integrated, faster installation of fixture, EM and sensor</b>	Traditional appearance, wide housing, popular	<b>Compact size, popular</b>	Strip retrofit kit, popular, Cost-effective	<b>Stairwell</b> , Sensor integrated, Right angle edge fits ceiling and wall
Power	18W-90W	18W-90W	18W-90W	18W-90W	18W-90W	18W-55W
Lumens	2,340L – 11,700L	2,340L – 11,700L	2,340L – 11,700L	2,340L – 11,700L	2,340L – 11,700L	2,160L – 6,600L
LPW	130LPW	130LPW	130LPW	130LPW	130LPW	120LPW
Power	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable
CCT	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)
Ta Rating	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C
Listings	Damp Location	Damp Location	Damp Location	Damp Location	Damp Location	Damp Location
DLC	5.1S Linear ambient 5.1P Stairwell	5.1S Linear ambient 5.1P Stairwell	5.1S Linear ambient 5.1P Stairwell	5.1S Linear ambient 5.1P Stairwell	5.1S Retrofit Kit	5.1P Stairwell
Optics	Frosted lens, PMMA	Frosted lens, PMMA	Frosted lens, PMMA	Frosted lens, PMMA	Frosted lens, PC	Frosted lens, PC
Lengths	2FT/3FT/4FT/8FT	2FT/3FT/4FT/8FT	2FT/3FT/4FT/8FT	2FT/3FT/4FT/8FT	4FT/8FT	2FT/4FT
Electrical scalability	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V
Mounting kits options	Cable kit, Chain kit, Surface mount kit, Wire guards, Row-connection kit	Cable kit, Chain kit, Surface mount kit, Wire guards, Row-connection kit	Surface mount kit(default), Cable kit, Chain kit, Wire guards, Row-connection kit	Surface mount kit(default), Cable kit, Chain kit, Wire guards, Row-connection kit	N/A	Wire guards






LED Troffer & Retrofit Kit	ETLDI01D	ETLDI01B	ETLDI07	ETLDI10	ETLTRK01D	ETLTRK01B
	<b>NEW</b>				<b>NEW</b>	
Features	Deliver soft light with an unprecedented level of uniformity	Low profile, cost-effective	2 module boards, indirect light, artistic expression	3 luminous surfaces, artistic expression	Troffer Retrofit Kit, Deliver soft light with an unprecedented level of uniformity	Troffer Retrofit Kit, cost-effective
Power	18W-56W	18W-56W	20W-45W	25W-50W	18W-56W	18W-45W
Lumens	2,340L – 7,280L	2,250L – 7,000L	2,500L – 5,625L	2,750L – 5,500L	2,340L – 7,280L	2,250L – 5,625L
LPW	130 LPW	125 LPW	125 LPW	110 LPW	130LPW	125 LPW
Power	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed/3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable
CCT	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)	Fixed, 3500K/4000K/5000K	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)
Ta Rating	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C
Listings	Damp Location	Damp Location	Damp Location	Damp Location	Damp Location	Damp Location
DLC	5.1P/5.1S	5.1P/5.1S	5.1P	5.1S	5.1P/5.1S	5.1P/5.1S
Optics	Frosted lens, PC	Frosted lens, PMMA	PMMA frosted lens	Frosted lens, PS	Frosted lens, PC	Frosted lens, PMMA
Electrical scalability	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V	DC sensor, EM, Dim to Off, 120-347V
Mounting kits options	Surface mount kit, Drywall mount kit	Surface mount kit, Drywall mount kit	SMK	Surface mount kit, Drywall mount kit	n/a	n/a
Size	2x2: 23.8"*23.8"*2.1" 2x4: 47.8"*23.8"*2.1" 1x4: 47.8"*11.9"*2.1"	2x2: 23.8"*23.8"*2.1" 2x4: 47.8"*23.8"*2.1" 1x4: 47.8"*11.9"*2.0"	2*2:23.8"*23.8"*3.6" 2*4:47.8"*23.8"*3.6"	2x2: 23.8"*23.8"*3.0" 2x4: 47.8"*23.8"*3.0"	2x2: 23.8"*23.9"*3.1" 2x4: 47.8"*23.9"*3.1"	2x2: 23.8"*23.9"*3.1" 2x4: 47.8"*23.9"*3.1" 1x4: 47.8"*11.9"*3.1"



## LED Panel & Retrofit Kit

### ETLPZG2





### ETLTRK-PA








Features	Traditional appearance, cost-effective	Panel retrofit kit
Power	30/25/20, 40/30/25, 50/40/30, 60/50/40	18W-46W
Lumens	2,500L – 7,500L	2,250L – 5,750L
LPW	125LPW /110LPW	125LPW
Temperature Rating	-20°C - 50°C	-20°C - 50°C
Power	3-steps Switchable	Fixed or 3-steps Switchable
CCT	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)
listings	Damp Location, Type IC	Damp Location, Type IC
DLC	5.1P/5.1S	5.1P
Optics	Frosted lens, PS	Frosted lens, PS
Electrical scalability	DC sensor, EM, Dim to Off,120-347V	DC sensor, EM, Dim to Off, 120-347V
Mounting kits options	Surface mount kit, Drywall mount kit, Suspension mount kit	Surface mount kit, Drywall mount kit
Size	2x2: 23.7"*23.7"*1.4" 2x4: 47.8"*23.7"*1.4" 1x4: 47.8"*11.9"*1.4"	2x2: 23.8"*23.9"*3.1" 2x4: 47.8"*23.9"*3.1" 1x4: 47.8"*11.9"*3.1"



LED Vapor Tight	ETLCP-B	ETLDP-B
	<b>NEW</b> 	<b>NEW</b> 
Features	Luminous part integrated, Narrow 5VA housing	Luminous part integrated, Wide 5VA housing
Power	18W-90W	18W-90W
Lumens	2,340L – 11,700L	2,340L – 11,700L
LPW	130LPW	130LPW
Temperature Rating	-40°C -50°C (suspended at least 18" from ceiling) -40°C -45°C (surface mounted)	-40°C -50°C (suspended at least 18" from ceiling) -40°C -45°C (surface mounted)
Power	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable
CCT	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)
listings	Wet Location, IP66, IK10, 5VA Flame Rating, NEMA4X, NSF*	Wet Location, IP66, IK10, 5VA Flame Rating, NEMA4X, NSF*
DLC	5.1S	5.1S
Optics	Frosted lens, PC	Frosted lens, PC
Electrical scalability	DC sensor, EM, Dim to off, 120-347V	DC sensor, EM, Dim to off, 120-347V
Mounting kits options	Surface mount kit, Cable kit, Chain kit, Wire guards	Surface mount kit, Cable kit, Chain kit, Wire guards
Size	2FT:23.6"*3.8"*3.1" 4FT:47.2"*3.8"*3.1" 8FT:94.5"*3.8"*3.1"	2FT:24.8"*5.0"*3.6" 4FT:49.8"*5.0"*3.6" 8FT:94.5"*5.0"*3.6"

\* NSF certification available.




LED Wraparound Fixtures	WRAP01	WRAP03	WRAP04	WRAP05	WRAP07
					
Features	Prismatic lens, rectangle end-cap	Stetson-shape end-cap	Arc end-cap	Cost-effective, compact size	Wide housing, easily cover up existing blemishes
Power	22W-42W	22W-40W	22W-46W	20W-48W	32W-54W
Lumens	2,900L – 5,500L	2,900L – 5,280L	2,900L – 6,200L	2,300L – 5,600L	3,680L – 6,300L
LPW	130LPW	130/150 LPW	130 LPW	115LPW	115LPW
Temperature Rating	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C	-20°C - 50°C
Power	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable	Fixed or 3-steps Switchable
CCT	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)	Fixed or Switchable (3500K/4000K/5000K)
listings	Damp Location	Damp Location	Damp Location	Damp Location	Damp Location
DLC	5.1S	5.1S	5.1S	5.1S	5.1S
Optics	Frosted lens PMMA	Frosted lens PMMA	Frosted lens PMMA	Frosted lens PMMA	Frosted lens PMMA
Electrical scalability	DC sensor, EM, Dim to off, 120-347V	DC sensor, EM, Dim to off, 120-347V	DC sensor, EM, Dim to off, 120-347V	DC sensor, Dim to off, 120-347V, linkable version	DC sensor, EM, Dim to off, 120-347V
Mounting kits options	N/A	Cable kit, Chain kit, Pendant box	Cable kit, Chain kit	Chain kit(linkage version)	n/a
Size	4FT:48.6"*6.5"*2.5"	2FT:24.5"*7.1"*2.8" 4FT:47.7"*7.1"*2.8"	4FT:46.0"*9.7"*3.4"	2FT:24.4"*5.3"*2.1" 4FT:47.6"*5.3"*2.1"	4FT:47.6"*10.0"*3.1"





# ETLSFC Direct, Direct-Indirect LED Linear light

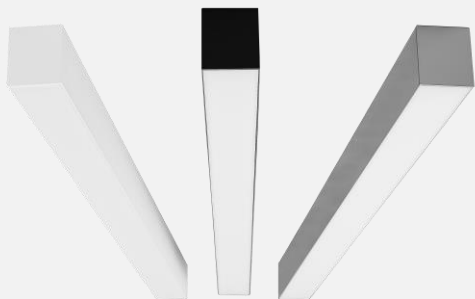

### Dimensions

2 versions of different width

ETLSF-W

ETLSF-V

Available in  
2FT(24.0"), 4FT(47.6"), 8FT(94.3")

### Distributions

ETLSFA  
Direct only

ETLSFB  
Direct-Indirect

Direct-Indirect flux ratio adjustable

	Direct	Indirect
100%	100%	0%
70%	70%	30%
50%	50%	50%

## Top features

- 115 lm/W, 1,700lm-10,350lm, DLC 5.1S.
- White(default), black, silver finish optional.
- Field-adjustable Power and CCT.
- Direct-Indirect flux ratio adjustable.
- Continuous run available thanks to flexible PC diffuser.
- Multiple connection methods.
- Sensor and EM solution ready.



## Mounting and Connection



"I" connecting



"L" connecting



"T" connecting



"+" connecting



# ETLC LED UNDER CABINET LIGHT

Simple and slim, 5 CCT switchable



Linkage version is available.  
Products compatible with both Triac dimming  
and 0-10V dimming are available.\*

Power	5W, 9W, 14W, 18W
Lumens	340L - 1,296L
LPW	70LPW
Dimming type	Triac dimming
Input voltage	120V
Temperature Rating	-20°C - 45°C
Power Switchable	Customization available
CCT	5 CCT field-adjustable 2700K/3000K/3500K/4000K/5000K
Optics	Frosted lens, PC
Mounting	Surface mount, Row mount
Size	Length: 9", 12", 18", 21", 24", 33", 42" Width: 3.5", Height: 1.1"

\*The standard version is compatible with triac dimming only and non-linkable ends.



# What you need, where you need it.



Manufacturing



Warehouse / Logistic Centers



Sports / Multi-Purpose



Service Bays



Healthcare /Office



Retail/Supermarket/Grocery



**Competitive products**  
**Guaranteed performance**

# Contact us

To really sincere to serve you



## JIANGSU EVER-TIE LIGHTING CO. LTD



Add: No.18 East Fuxing Road, NETDA, Nantong City, Jiangsu Province, China



Tel: +86-513-68223333

Monday to Friday(8:30 a.m. to 6:00 p.m. Beijing time)



E-mail: [Info@evertielighting.com](mailto:Info@evertielighting.com)

Monday to Friday(8:30 a.m. to 6:00 p.m. Beijing time)